

## DS-2CE78H8T-IT3F 5 MP Ultra-Low Light Camera



### Key Feature

- 5 MP high performance CMOS
- 2560 × 1944 resolution
- 2.8 mm, 3.6 mm, 6 mm, 8 mm, 12 mm fixed lens
- EXIR 2.0, smart IR, up to 60 m IR distance
- OSD menu, 3D DNR, 130 dB true WDR
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- IP67
- Up the coax (HIKVISION-C)




## Specification

| Camera                       |  |
|------------------------------|--|
| Image Sensor                 | 5 megapixel progressive scan CMOS  |
| Signal System                | PAL/NTSC   |
| Resolution                   | 2560 (H) × 1944 (V)  |
| Min. Illumination            | Color: 0.003 Lux@(F1.2, AGC ON), 0 Lux with IR   |
| Frame Rate                   | TVI: 2 MP@25fps, 2 MP@30fps, 4 MP@25fps, 4 MP@30fps, 5 MP@20fps<br>AHD: 4 MP@25fps, 4 MP@30fps, 5 MP@20fps<br>CVI: 4 MP@25fps, 4 MP@30fps<br>CVBS: PAL, NTSC |
| Shutter Time                 | PAL: 1/25 s to 1/50,000 s<br>NTSC: 1/30 s to 1/50,000 s  |
| Lens                         | 2.8 mm, 3.6 mm, 6 mm, 8 mm, 12 mm fixed lens   |
| Horizontal Field of View     | 98° (2.8 mm), 78° (3.6 mm), 48° (6 mm), 37° (8 mm), 23° (12 mm)  |
| Lens Mount                   | M12  |
| Day & Night                  | IR cut filter  |
| Angle Adjustment (Bracket)   | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360°   |
| Synchronization              | Internal synchronization   |
| WDR (Wide Dynamic Range)     | ≥ 130 dB   |
| Menu                         |  |
| AGC                          | Yes  |
| Day/Night Mode               | Auto/Color/BW (Black and White)  |
| White Balance                | Auto/Manual  |
| BLC (Backlight Compensation) | Yes  |
| WDR                          | Yes  |
| 3D DNR                       | Level 1 to 9   |
| Privacy Mask                 | 4 programmable privacy masks   |
| Motion Detection             | 4 programmable areas   |
| Language                     | English  |
| Functions                    | Brightness, Sharpness, 3D DNR, Mirror, Smart IR  |
| Interface                    |  |
| Video Output                 | 1 HD analog output   |
| Switch Button                | TVI/AHD/CVI/CVBS   |
| General                      |  |
| Operating Conditions         | -40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensing)   |
| Power Supply                 | 12 VDC ±25%<br><i>*You are recommended to use one power adapter to supply the power for one camera.</i>  |
| Power Consumption            | Max. 5.8 W   |
| Protection Level             | IP67   |
| Material                     | Enclosure: Plastic<br>Main body: Metal   |
| IR Range                     | Up to 60 m   |
| Communication                | Up the coax, Protocol: HIKVISION-C (TVI output)  |
| Dimensions                   | Φ 109.82 mm × 91.03 mm (Φ 4.32" × 3.6")  |
| Weight                       | Approx. 310 g (0.68 lb.)   |

**Order Model**

DS-2CE78H8T-IT3F

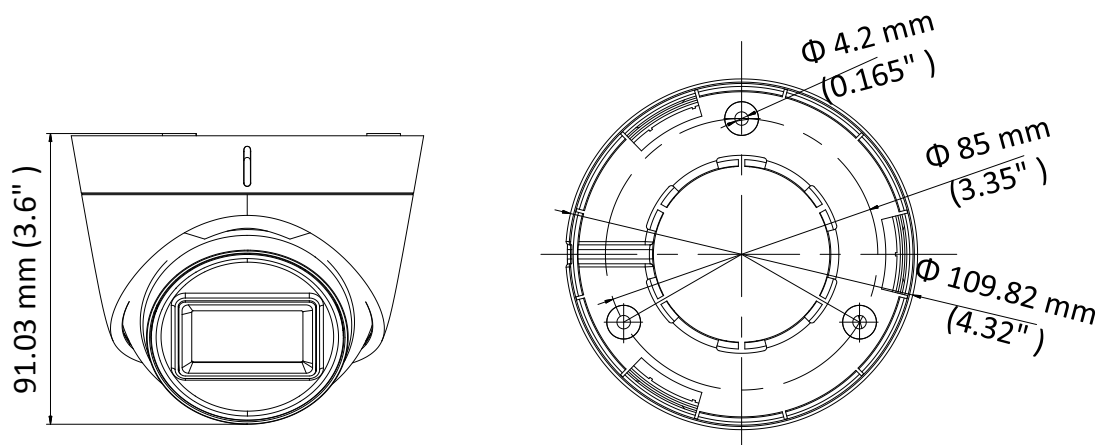**Dimension**

## Accessory



**DS-1272ZJ-110-TRS**  
Wall Mount




**DS-1275ZJ-SUS**  
Vertical Pole Mount



**DS-1276ZJ-SUS**  
Corner Mount



**DS-1281ZJ-S**  
Inclined Ceiling Mount



**DS-1280ZJ-S**  
Junction Box

Distributed by

## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216) 521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com