




## Key Feature

- Modular door station Main unit, needs mounting bracket
- 2MP HD Camera, Fish eye, IR Supplement
- 1 Call physical Button, 2 lock relays, 4-ch alarm input
- IP65, 12 VDC or standard POE
- Video intercom to indoor station and master station

## Typical Application

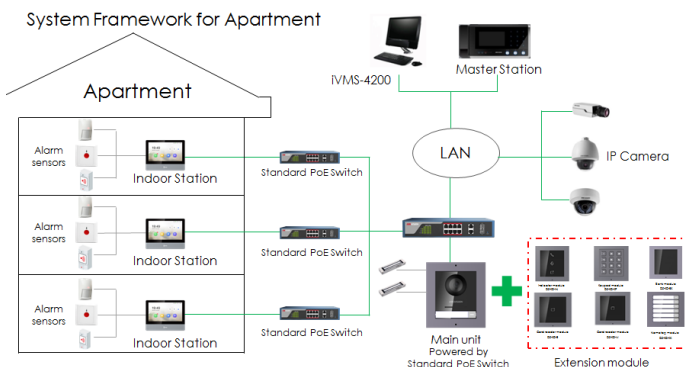

## Specification

### System parameters

Operation system	Embedded Linux operation system
Flash	16 MB
RAM	256 MB
CPU	Embedded MCU Processor

### Display parameters

Size	/
Operation method	/

Type	/
Resolution	/

### Video parameters

Video compression standard	H.264
Supplement light	IR supplement
Lens	Low Illumination 2 MP HD IR Camera
FOV	Horizontal: 180° , Vertical: 96°
WDR	Support
Pixel	Main stream : 1920 × 1080 Sub stream : 720 × 480

### Audio parameters

Audio input	Built-in omnidirectional microphone
Audio compression standard	G.711 U
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable

### Capacity

Fingerprint capacity	/
User capacity	/
Face capacity	/




Linked indoor station	100
Event capacity	/
<b>Network parameters</b>	
Communication protocol	TCP/IP, RSTP
Wired network	Support
Wi-Fi	/
Bluetooth	/
3G/4G	/
<b>Device interfaces</b>	
Alarm input	4
TAMPER	1
Network interface	1 10/100M self-adaptive Ethernet
Exit button	2
RS-485	1
USB	/
Wiegand	/
TF card	/
Alarm output	2
Lock control	2
Door contact input	2
Power interface	1
<b>General</b>	
Button	/
Installation	Flush mounting, surface mounting
Indicator	/
Weight	Without package: 415 g With package: 625 g
Protective level	IP65
Working temperature	-40° C to +55° C (-40° F to 131° F)
Working humidity	10% to 95%
Dimensions	98 mm × 99.8 mm × 43.9 mm (3.86" × 3.93" × 1.73")
Battery	/
Power supply	IEEE802.3af, standard PoE 12 VDC, 1 A
Application environment	Outdoor
Power consumption	≤10 W

## Available Model


DS-KD8003-IME1/S

## Appearance and Interfaces

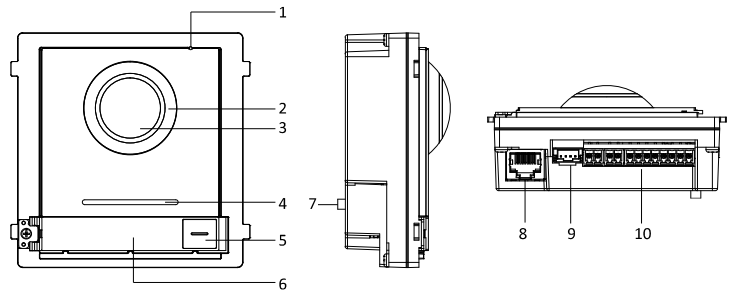


No.	Description	No.	Description
1	Microphone	6	Nametag
2	Low Illumination IR Supplement Light	7	TAMPER
3	Built-in Camera	8	Network Interface
4	Loudspeaker	9	Module-connecting Interface (output)
5	Call Button	10	Terminals

## Dimension

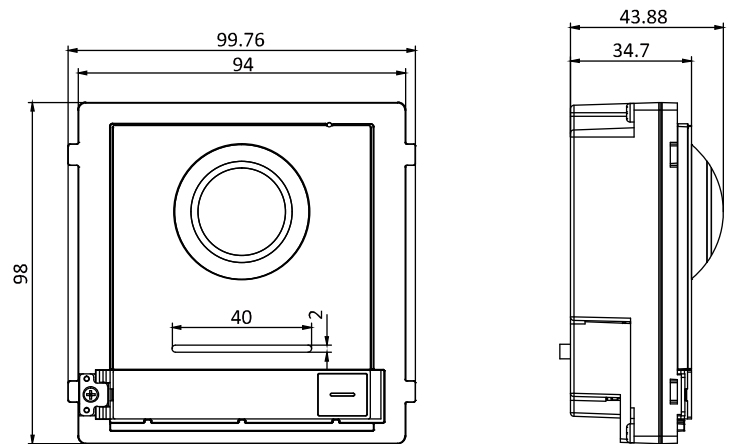

Distributed by

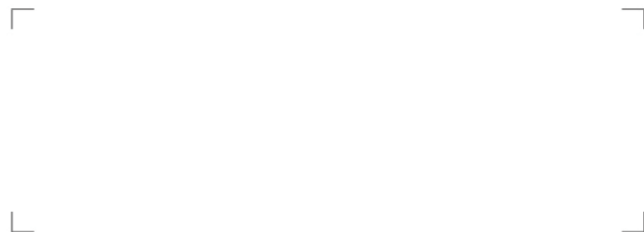**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com