

## DS-2CC12D9T(-A)


### HD1080P Turbo HD Box Camera



#### Key features

- HD1080P Video Output
- Adopt HDTV Technology
- True Day/Night
- 3D DNR, Smart IR
- True WDR, up to 120dB
- OSD menu controlled via UTC
- -A: 24V AC/ 12V DC

#### Dimensions

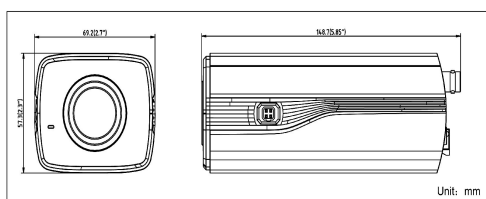

#### Accessories



DS-1322HZ-C Outdoor Housing



DS-1293ZJ Wall Mounting Long Arm



DS-1292ZJ Wall Mounting Short Arm

#### Lens



HV3816D-8MPiR Auto Iris Manual Focusing 8MP HD Lens



HV1140D-8MPiR Auto Iris Manual Focusing 8MP HD Lens



TV2810D-MPIR Auto Iris Manual Focusing 3MP IR Lens

#### Available models

DS-2CC12D9T

DS-2CC12D9T-A

DS-2CC12D9T(-A)	
Camera	
Image Sensor	1/3" Progressive Scan CMOS
Signal System	PAL/NTSC
Effective Pixels	1920(H)*1080(V)
Min. Illumination	Color : 0.01 Lux @(F1.2,AGC ON) B/W : 0.001 Lux @(F1.2,AGC ON)
Shutter Time	1/25(1/30) s to 1/50,000 s
Lens Mount	C/CS mount
Auto-iris	ICR
Synchronization	Internal synchronization
WDR	120dB
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 Analog HD output
CVBS Output	1Vp-p Composite Output(75Ω/BNC)
S/N Ratio	More than 52dB
Menu	
Scene	Indoor, Outdoor, Indoor1, LOW-LIGHT
Camera ID	On/off (15 characters, position programmable)
AGC	Support
D/N Mode	Color/BW/EXT
White Balance	ATW, AWC-SET, Indoor, Outdoor, Manual
Privacy Mask	On/Off, maximum 8 zones
Motion Detection	On/Off, maximum 4 zones
BLC	Support
Anti-flicker	On/off
Language	nglish, Japanese, CHN1, CHN2, Korean, German, French, Italian, Spanish, Polish, Russian, Portuguese, Dutch, Turkish, Hebrew and Arabic
Functions	Eclipse, Digital noise reduction, Digital zoom(62x), Slow shutter, Mirror, Defog, Defect pixel correction, SMART D-ZOOM
General	
Working Temperature/ Humidity	-30 °C – 60 °C (-22 °F – 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12V DC, -A: 24V AC, 12V DC
Power Consumption	Max. 4W, -A: Max. 4.5W
Communication	Up the coax(need UTC controller) Protocol: Pelco-C(Coaxitron)
Dimensions	69.2×57.3×148.7 mm (2.7" × 2.3" × 5.85")
Weight	400g