

**DS-3T0510HP-E/HS****8-Port Gigabit Unmanaged Hi-PoE Switch**

DS-3T0510HP-E/HS switches are layer 2 Hi-PoE switches, providing advanced PoE power supply technology and wider temperature (-30 to 65 °C) design on the basis of high-performance access to ensure stable data upload. The switches support Hi-PoE, long range, port isolation, and PoE watchdog function.

**Key Feature**

- 6 × gigabit PoE RJ45 ports, 2 × gigabit Hi-PoE RJ45 ports and 2 × gigabit SFP fiber optical ports.
- IEEE 802.3at/af/bt standard for Hi-PoE port (Max. 90 W PoE output).
- IEEE 802.3at/af standard for PoE ports (Max. 30 W PoE output).
- IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z and IEEE 802.3ab standard.
- 6 KV surge protection for PoE ports.
- PoE output power management.
- Up to 300 m long-range transmission.
- PoE watchdog to auto detect and restart the cameras that do not respond.
- Port isolation to improve network security.
- Wider temperature (-30 to 65 °C) design.
- Wire-speed forwarding.
- Store-and-forward switching.
- Solid high-strength metal shell.
- Reliable fan-free design.




## Specification


Model		DS-3T0510HP-E/HS
Network parameters	Port number	6 × gigabit PoE RJ45 ports, 2 × gigabit Hi-PoE RJ45 ports and 2 × gigabit SFP fiber optical ports
	Port type	RJ45 port, full duplex, MDI/MDI-X adaptive
	Standard	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z and IEEE 802.3ab
	Forwarding mode	Store-and-forward switching
	Working mode	Standard mode (default), Extend mode, Isolation mode, PoE watchdog mode
	Ports for long-distance transmission	Ports 7 and 8
	MAC address table	4 K
	Switching capacity	20 Gbps
	Packet forwarding rate	14.88 Mpps
	Internal cache	1.5 Mbits
PoE power supply	PoE standard	Ports 1 and 2: IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt Ports 3 to 8: IEEE 802.3af, IEEE 802.3at
	PoE power pin	Ports 1, 2, 7 and 8: Ethernet cables 1/2/3/6 and 4/5/7/8 provide power supply simultaneously. Ports 3 to 6: Ethernet cables 1/2/3/6 provide power supply.
	PoE port	Ports 3 to 8
	Hi-PoE port	Ports 1 and 2
	Max. port power	Ports 1 and 2: 90 W Ports 3 to 8: 30 W
	PoE power budget	110 W
Dialing function	Long range	Ports 7 and 8: up to 300 m.
	Port isolation	Ports 1 to 8: port isolation mode to improve network security.
	PoE watchdog	Ports 1 to 8: auto detect and restart the cameras that do not respond.
General	Shell	Metal material, fan-free design
	Gross weight	1.11 kg (2.45 lb)
	Net weight	0.585 kg (1.29 lb)
	Dimension (L × H × D)	197 mm × 114.2 mm × 42.2 mm (7.76" × 4.50" × 1.66")
	Operating temperature	-30 °C to 65 °C (-22 °F to 149 °F)
	Storage temperature	-40 °C to 85 °C (-40 °F to 185 °F)
	Operating humidity	5% to 95% (no condensation)
	Storage humidity	5% to 95% (no condensation)
	Power supply	48 to 57 VDC, 2.5 A Max.
	Power consumption in idle	< 10 W
	Max. power consumption	120 W
	Power source	120 W
Approval	EMC	FCC (47 CFR Part 15, Subpart B); CE-EMC (EN 55032: 2015, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 55024: 2010 +A1: 2015); RCM (AS/NZS CISPR 32: 2015); IC (ICES-003: Issue 6, 2016)
	Safety	UL (UL 60950-1); CB (IEC 60950-1:2005 + Am 1:2009 + Am 2:2013); CE-LVD (EN 60950-1:2005 + Am 1:2009 + Am 2:2013)
	Chemistry	CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006)

## Physical Interface

Front panel:

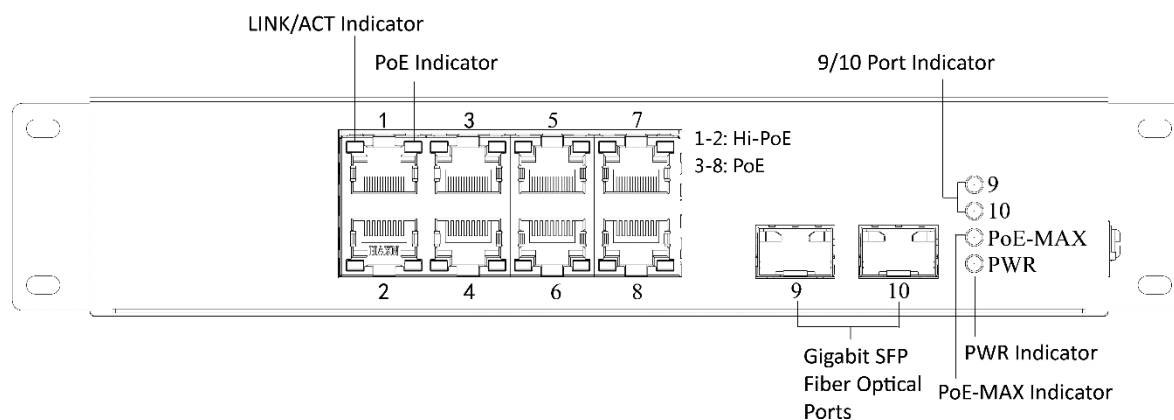


Back panel:

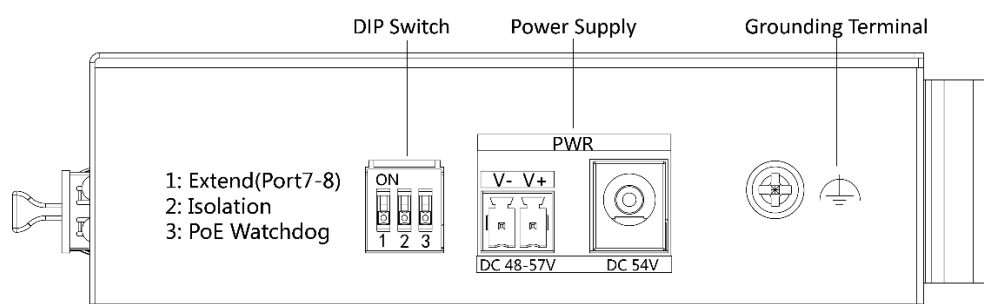

## Available Model

DS-3T0510HP-E

**Dimension (unit: mm)**

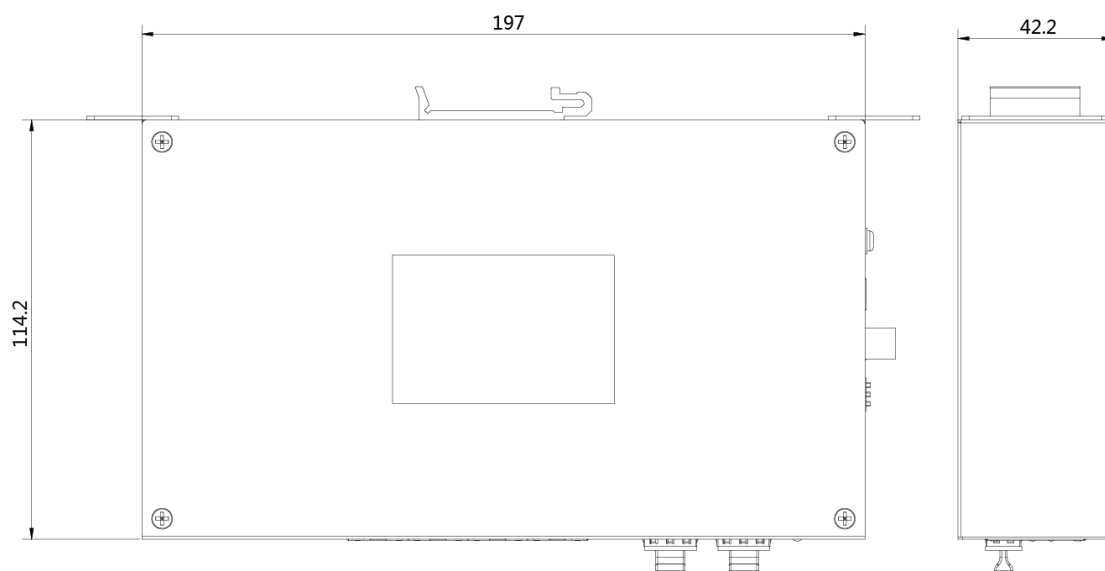


## Typical Application

### 8-Port Gigabit PoE

Gigabit Unmanaged PoE

Pro-Series

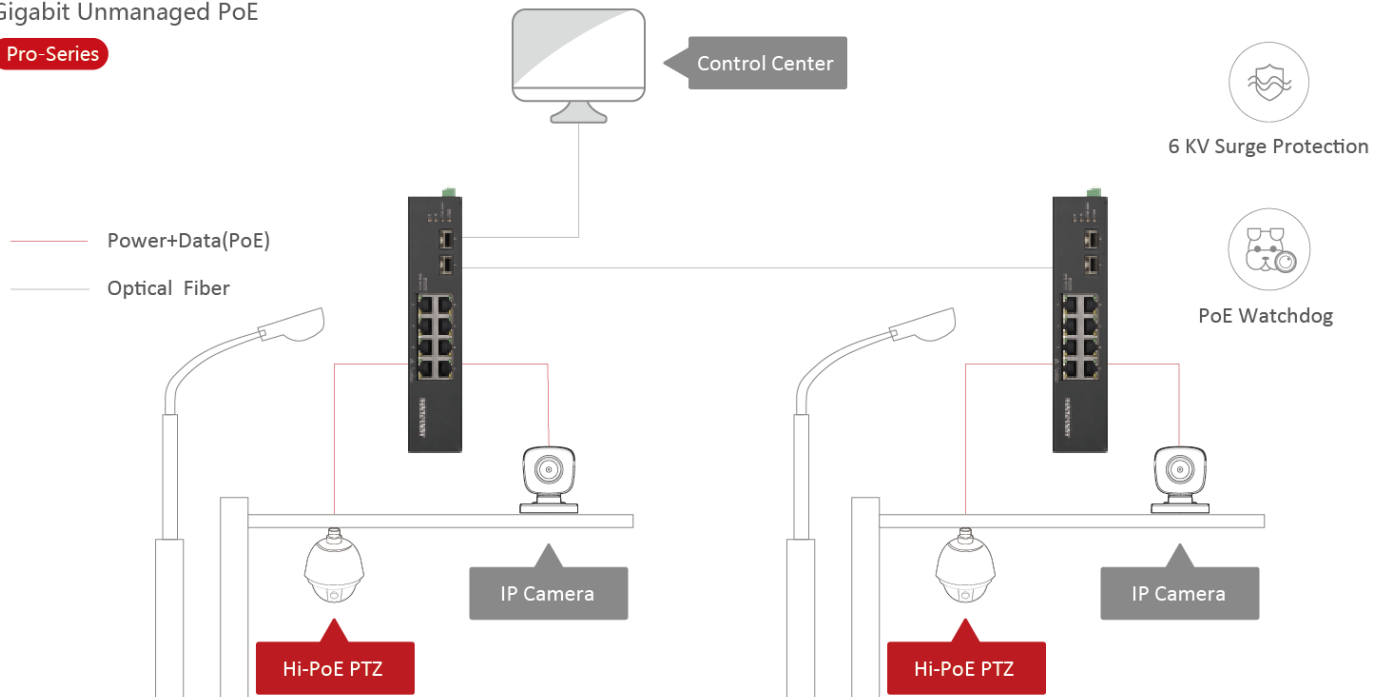

Distributed by



# HIKVISION®

#### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**HIKVISION USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**HIKVISION Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**HIKVISION India**  
T +91-22-28469900  
sales@pramahikvision.com

**HIKVISION Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**HIKVISION Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**HIKVISION Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**HIKVISION Italy**  
T +39-0438-6902  
info.it@hikvision.com

**HIKVISION Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**HIKVISION Turkey**  
T +90 (216) 521 7070- 7074  
sales.tr@hikvision.com

**HIKVISION Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**HIKVISION UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**HIKVISION South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**HIKVISION France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**HIKVISION Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**HIKVISION Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**HIKVISION UAE**  
T +971-4-4432090  
salesme@hikvision.com

**HIKVISION Singapore**  
T +65-6684-4718  
sg@hikvision.com

**HIKVISION Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**HIKVISION Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**HIKVISION Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**HIKVISION Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**HIKVISION Korea**  
T +82-[0]31-731-8817  
sales.korea@hikvision.com

**HIKVISION Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**HIKVISION Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**HIKVISION Colombia**  
sales.colombia@hikvision.com