

DS-D5024FC-C 24-inch Monitor



- Ultra-thin device body with ultra-thin border for 3 sides.
- 2 channels of 8 bit/10 bit LVDS HD (1920*1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Built-in speaker for audio input.
- Support 1 channel BNC surveillance video input with professional surveillance standard BNC interface.
- Multimedia playing of text, image, audio, video, etc.
- Support VESA wall mount.



• Specification

Model		DS-D5024FC-C
Display	Screen Size	23.8"
	Active Display Area	527.04(H) mm x 296.46(V) mm
	Resolution	1920 × 1080
	Backlight	E-LED
	Pixel Pitch	0.0915 (H) mm × 0.2745 (V) mm
	Brightness	250 cd/m ²
	Viewing Angle	178°/178°
	Color Depth	8 bit
	Contrast Ratio	4000 : 1
	Response Time	6.5 ms (typ)
	Refresh Rate	60 Hz
	Haze	25 %
	Reliability	7 × 18 H
	Color Gamut	72%
Interface	Video & Audio Input	HDMI × 1, VGA × 1, Audio In × 1, USB 2.0 × 1, BNC × 1
Power	Power Supply	100-240 VAC, 50/60 Hz
	Power Consumption	≤ 22 W
	Standby Consumption	≤ 0.5 W
Working Environment	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	20% to 90% RH (Non-Condensing)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	10% to 90% RH (Non-Condensing)
General	Casing Material	Plastic
	VESA	75 mm × 75 mm, 4-M6 × 6 screw holes
	Bezel Width	1.9 mm (top/left/right), 23.55 mm (bottom)
	Product Dimensions (W × H × D)	With base: 539.1 (W) mm × 433.199 (H) mm × 43.78 (D) mm (21.22" × 17.05" × 1.88") Without base: 539.1 (W) mm × 328.325 (H) mm × 43.78 (D) mm (21.22" × 12.93" × 1.88")
	Package Dimensions (W × H × D)	650 (W) mm × 475 (H) mm × 135 (D) mm (25.5" × 18.7" × 5.31")
	Net Weight	3.6 ± 0.5 kg (7.9 ± 1.1 lb.)
	Gross Weight	5.0 ± 0.5 kg (11.0 ± 1.1 lb.)
	Packing List	Monitor × 1, AC power cable × 1, base bracket × 1, user manual × 1, quick start guide × 1, HDMI cable × 1

Remarks

*The base is included by default.

*The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information.


Available Model

DS-D5024FC-C

Physical Interface

Interface	Description	Interface	Description
HDMI	HDMI digital signal input	VGA	VGA analog signal input
AC 100-240V~	100-240 VAC power supply	AUDIO IN	3.5mm Audio Input
USB	USB 2.0	BNC	CVBS Signal Input

Dimension

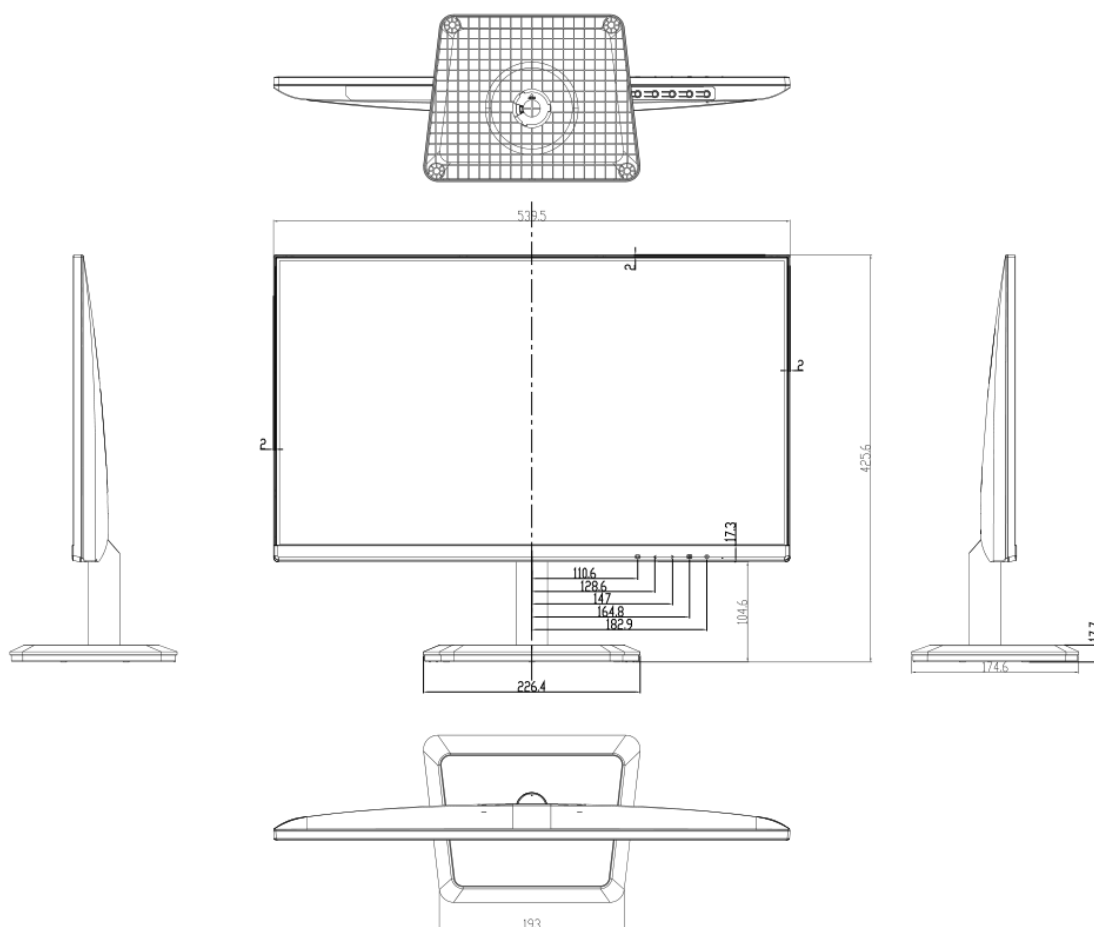

▪ **Accessory**

▪ **Optional**

DS-DM1940W

Wall-mounted

Bracket



Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com