

# DS-KD9633-E6

## Video Intercom Face Recognition Door Station

**HIKVISION**



### Key Feature

- Aluminum frame with anodizing processing and ultra thin fuselage
- 2.5D curved 10.1-inch IPS touch screen
- Higher protection level, IP65 & IK07
- Multiple authentication ways
- Optional sub module

### Specification

#### System parameters

|                  |                    |
|------------------|--------------------|
| Operating system | Android 7.1        |
| ROM              | 4 GB               |
| RAM              | 2 GB               |
| CPU              | Embedded Processor |

#### Display parameters

|                  |              |
|------------------|--------------|
| Screen size      | 10.1-inch    |
| Operation method | Touch screen |
| Type             | Colorful IPS |
| Resolution       | 1280 × 800   |

#### Video parameters

|                  |  |
|------------------|--|
| Supplement light | Low illumination, IR supplement lights |
| Video standard   | H.264                                  |
| Lens             | 1                                      |
| FOV              | Horizontal: 88° , Vertical: 44°        |
| WDR              | Support                                |
| Resolution       | 2 MP                                   |

#### Audio parameters

|                            |   |
|----------------------------|---|
| Audio compression standard | G.711 U, G.711 A                        |
| Audio input                | Built-in omnidirectional microphone     |
| Audio output               | Built-in loudspeaker                    |
| Audio compression bitrate  | 64 Kbps                                 |
| Audio quality              | Noise suppression and echo cancellation |
| Volume adjustment          | Adjustable                              |

#### Capacity

|                                |        |
|--------------------------------|--------|
| Fingerprint capacity           | /      |
| User capacity                  | 20000  |
| Card capacity                  | 100000 |
| Face capacity                  | 10000  |
| Linked indoor station capacity | 500    |
| Event capacity                 | /      |
| Sub door station capacity      | 16     |

#### Network parameters

|                        |   |
|------------------------|---|
| Communication protocol | TCP/IP, RTSP                            |
| Wired network          | 10/100/1000 Mbps self-adaptive Ethernet |
| Wi-Fi                  | /                                       |
| Bluetooth              | /                                       |
| 3G/4G                  | /                                       |


| Authentication          |   |
|-------------------------|---|
| Card reading frequency  | 13.56 MHz   |
| Device interfaces       |   |
| Alarm input             | 4 (2 exit buttons and 2 door contacts by default)                                       |
| TAMPER                  | 1   |
| Network interface       | 2 RJ45 (1 reserved)   |
| Exit button             | 2 (1 for lock control and 1 for DS-K2M060 relay control)                                |
| RS-485                  | 2 (1 for Hikvision's card reader or elevator controller and 1 for DS-K2M060 by default) |
| USB                     | 2 for internal use only   |
| Wiegand                 | /   |
| TF card                 | 1 (reserved)  |
| Alarm output            | 2 (reserved)  |
| Lock control            | 2 (1 relay and 1 RS-485 to control the DS-K2M060)                                       |
| Door contact input      | 1   |
| Power interface         | 1   |
| General                 |   |
| Button                  | /   |
| Installation            | Surface mounting & flush mounting   |
| Indicator               | 0   |
| Weight                  | 1.265 kg  |
| Protective level        | IP65 & IK07   |
| Working temperature     | -30° C to 60° C (-22° F to 140° F)  |
| Working humidity        | 10% to 90%  |
| Dimensions              | 271 mm × 159.2 mm × 26.5 mm (10.7" × 6.3" × 1")   |
| Battery                 | /   |
| Power supply            | 12 VDC, 2 A   |
| Application environment | Outdoor   |
| Power consumption       | ≤ 18 W  |

|          |   |
|----------|---|
| Language | English, French, Portuguese, Brazilian Portuguese, Spanish, Russian, German, Italian, Polish, Turkish, Vietnamese, Arabic, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Lithuanian, Estonian, Latvian, Norwegian, Danish, Slovakia, Hebrew, Swedish, Finnish, TraChinese, Mongolian, HongKongTraChinese |
|----------|---|

## Available Model

DS-KD9633-E6

## Dimension

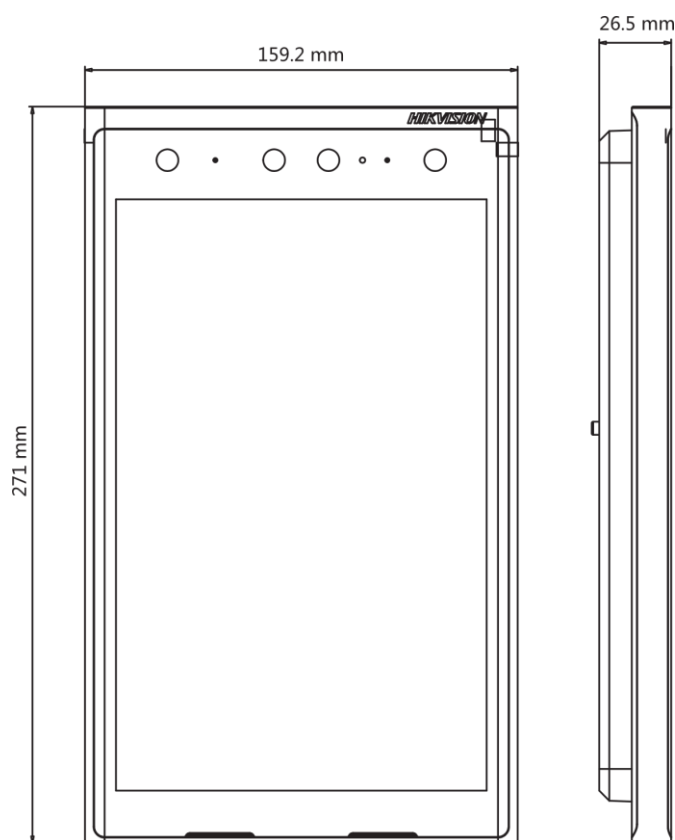

#### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.

