
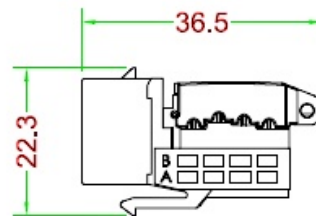




C5e KEYSTONE JACK UTP 50u

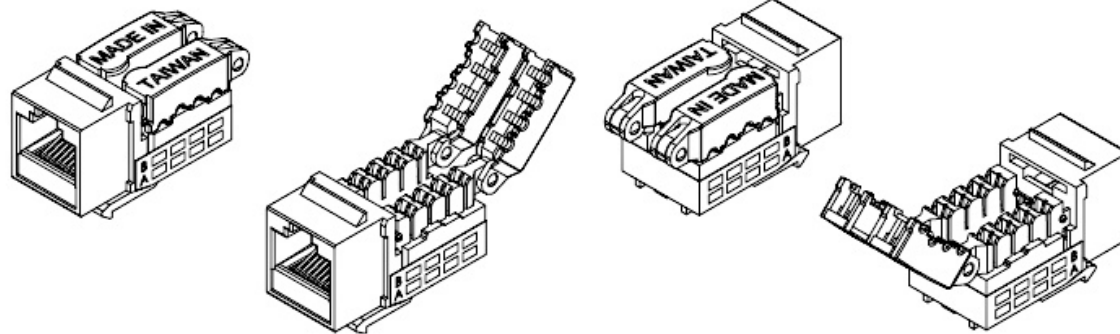

Performance:

Meets C5e EIA/TIA 568B Standard.

Materials:

Body : Fireproof ABS UL-94V0
Jack : 8P8C 50 micro inches gold plated
PCB : FR-4 / UL-94V0
IDC Cap : Fireproof PC
IDC Body : Fireproof ABS UL-94V0
IDC Pin : Phosphor Bronze & Tinned

IDC Description : For 22-26 AWG.
For 110 or Krone punch-down Tool
Toolless (when use IDC cap directly)

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)
Contact Resistance : 20m ohms (max.)
Current Rating : 1.5 Amps .
DC Resistance : 0.1 ohms (max.)
Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)
Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 °C ~ +70 °C

DRAW NO:		ITEM NO:	KSL5eUTP-S
	APPR	CUSTOMER:	
UNIT:	DESIGN	DATE:	
SCALE:	Ref. NO:	TOLERANCE:	X ± 1 · X ± 0,2 · XX ± 0,15

LEXINET
PROFESSIONAL NET ACCESSORIES