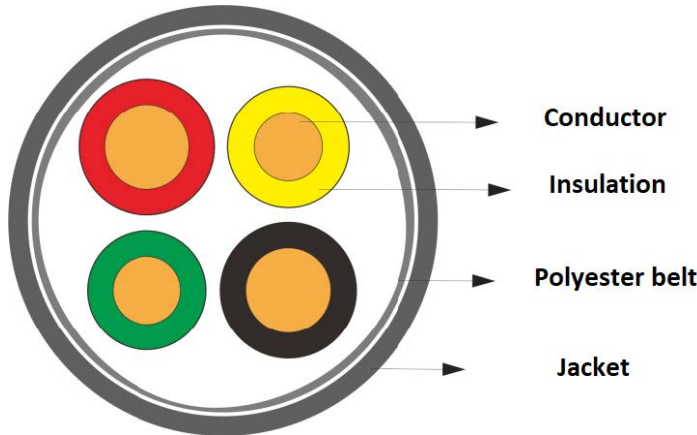


| | | | | |
|-----------------------------------------------------------------------------------------------|-------------------------------|----------------------------------------------------|-------------------------------|----------|
| TYPE: KL01EZS | | 4 wire UTP PVC-Eca2x24AWG+2x20AWG(2x0.5mm+2x0.8mm) | | |
| Physical | | | | |
| <div></div> | | | | |
| Style description | | | | |
| Wire & Cable Construction | | Physical Properties | | |
| Conductor 1 | Material: solid bare copper | Test Object Item | Insulation | Jacket |
| | Diameter: 0.50±0.008mm /24AWG | | | |
| | Insulation Color: YE, GN | Tensile strength | ≥10N/mm² | ≥10N/mm² |
| Insulation 2 | Material: PVC | Elongation | ≥150% | ≥150% |
| | Diameter: 1.0±0.01mm | | | |
| Conductor 2 | Material: solid bare copper | Electrical Properties | | |
| | Diameter: 0.80±0.008mm /20AWG | | | |
| | Insulation Color: RD, BK, | | | |
| Insulation 2 | Material: PVC | Test Object Item | Electrical Characteristics | |
| | Diameter: 1.45±0.01mm | | | |
| Polyester belt: 18*0.025mm | | Rated Temperature | 20℃ | |
| Jacket | Material: PVC | | | |
| | Diameter: 4.4±0.2mm | Rated voltage | 300/300V | |
| | Thickness: 0.7±0.05mm | | | |
| Jacket Color | | Max.Cond.Resistance | 0.5mm | ≤92 Ω/KM |
| | | | 0.8mm | ≤36 Ω/KM |
| WHITE | | Dielectric strength | AC.1500V,5min no breakdown | |
| Marking | | Packing | | |
| according with cusotmer requirement | | 500M/Box | | |