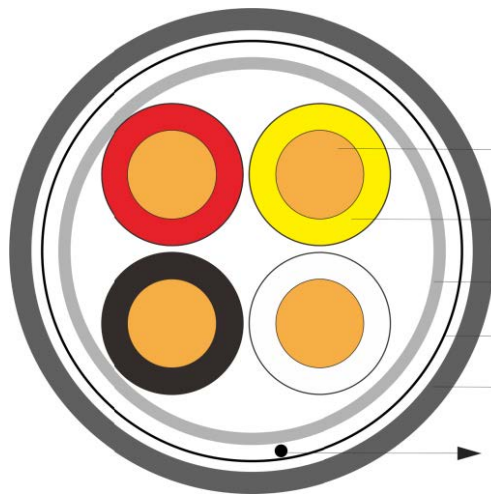


TYPE: KL4Ezs		4 wire FTP PVC - Eca 24AWG		
Physical				
<div><div></div><div><div>Conductor</div><div>Insulation</div><div>Polyester belt</div><div>Al foil</div><div>Jacket</div><div>Drain wire</div></div></div>				
Style description				
Wire & Cable Construction		Physical Properties		
Conductor	Material : solid bare copper	Test Object Item	Insulation	Jacket
	Diameter : 0.50±0.008mm /24AWG			
Insulation	Material : PVC	Tensile strength	≥10N/mm²	≥10N/mm²
	Diameter : 1.0±0.01mm			
Insulation Color	Insulation : RD, YE, WH, BK	Elongation	≥150%	≥150%
Polyester belt : 18*0.025mm		Electrical Properties		
Al foil: 18*0.025mm				
Drain wire : 7*0.16mm BC		Test Object Item	Electrical Characteristics	
Jacket	Material : PVC	Rated Temperature	20℃	
	Diameter : 4.1±0.2mm			
	Thickness : 0.65±0.05mm			
Jacket Color		Rated voltage	300/300V	
WHITE		Max.Cond.Resistance	≤92 Ω/KM	
Marking		Dielectric strength	AC.1500V,5min no breakdown	
according with cusotmer requirement		Packing		
		305M/Box		