

## **DS-KD8003-IME1(B)/NS** **Modular Door Station**



- Modular door station main unit, needs mounting bracket
- 2MP HD Camera, fish eye, IR supplement
- 2 lock relays, 4-ch alarm input
- Video intercom to indoor station and master station
- WEB configuration
- IP65, 12 VDC or standard PoE
- Power output for electronic lock, max to 12 V, 500 mA

## ▪ Specification


| System parameters              |   |
|--------------------------------|---|
| Operating system               | Embedded Linux operation system                   |
| ROM                            | 32 MB   |
| RAM                            | 256 MB  |
| CPU                            | Embedded Processor                                |
| Display parameters             |   |
| Screen size                    | NA  |
| Operation method               | NA  |
| Type                           | NA  |
| Resolution                     | NA  |
| Video parameters               |   |
| Supplement light               | Low illumination, IR supplement lights            |
| Video standard                 | H.264   |
| Lens                           | 1   |
| FOV                            | Horizontal: 146°, Vertical: 82°                   |
| WDR                            | Support   |
| Resolution                     | 2 MP  |
| Audio parameters               |   |
| Audio input                    | Built-in omnidirectional microphone               |
| Audio compression standard     | G.711 U, G.711 A                                  |
| Audio output                   | Built-in loudspeaker                              |
| Audio compression bitrate      | 64 Kbps   |
| Audio quality                  | Noise suppression and echo cancellation           |
| Volume adjustment              | Adjustable  |
| Capacity                       |   |
| Fingerprint capacity           | /   |
| User capacity                  | 2000  |
| Face capacity                  | NA  |
| Card capacity                  | 6000  |
| Linked indoor station capacity | 500   |
| Event capacity                 | /   |
| Sub door station capacity      | 16  |
| Network parameters             |   |
| Communication protocol         | TCP/IP, RTSP                                      |
| Wired network                  | 10/100 Mbps self-adaptive Ethernet                |
| Wi-Fi                          | NA  |
| Bluetooth                      | NA  |
| 3G/4G                          | NA  |
| Device interfaces              |   |
| Alarm input                    | 4 (2 exit buttons and 2 door contacts by default) |
| TAMPER                         | 1   |
| Network interface              | 1 RJ45  |
| Exit button                    | 2 (2 for lock control)                            |
| Door contact input             | 1   |

|                         |  |
|-------------------------|--|
| RS-485                  | 1 (1 for Hikvision's sub module communication)   |
| Wiegand                 | NA   |
| TF card                 | NA   |
| Alarm output            | NA   |
| Lock control            | 2 (2 relay)  |
| USB                     | NA   |
| Power interface         | 12 VDC Power Input (max to 12 V, 500 mA)   |
| Two-wire IP interface   | NA   |
| <b>General</b>          |  |
| Power supply            | 12 VDC/PoE ( IEEE 802.3af)   |
| Working temperature     | -40° C to 60° C (-40° F to 140° F)   |
| Working humidity        | 10% to 95%   |
| Button                  | 0  |
| Protective level        | IP65   |
| Installation            | Surface mounting & flush mounting  |
| Dimensions(L × W × H)   | 98 mm × 100 mm × 42 mm (3.86" × 3.94" × 1.65")   |
| Language                | English,French,Portuguese,BrazilianPortuguese,Spanish,Russian,German,Italian,Polish,<br>Turkish,Vietnamese,Arabic,Czech,Hungarian,Dutch,Romanian,Bulgarian,Ukrainian,Croatian,<br>Serbian,Greek,Slovak |
| Indicator               | 0  |
| Weight                  | Without package: 0.410 kg<br>With Package: 0.581 kg  |
| Battery                 | /  |
| Application environment | Outdoor  |
| Power consumption       | ≤ 5 W  |

## ▪ Available Model

DS-KD8003-IME1(B)/NS

## ▪ Dimension

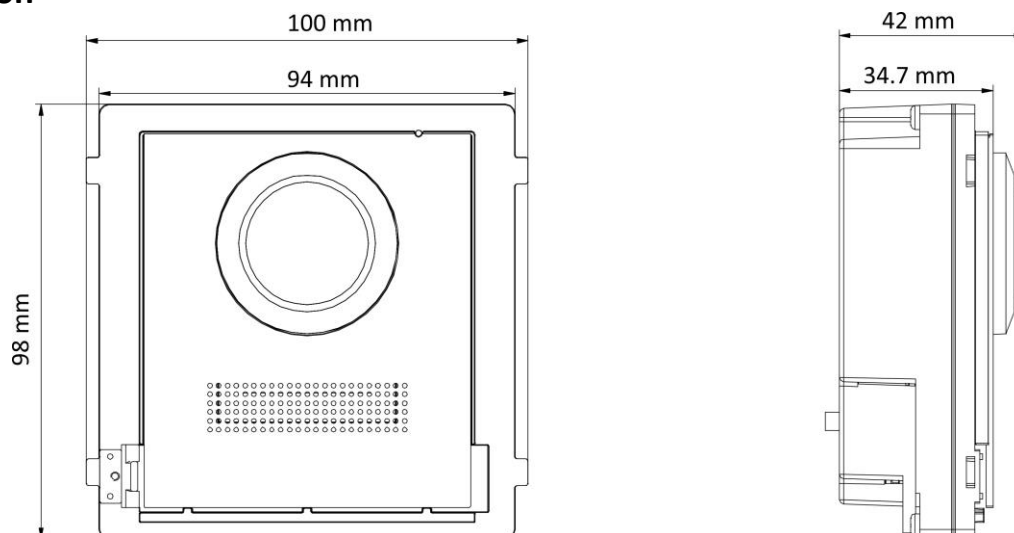

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq