




Key Feature

- 2-wire IP distributor
- 6 2-wire cascade interfaces with device power supply
- 2 cascade interfaces for DS-KAD706Y / DS-KAD706Y-S
- 8 interface indicators, 1 RJ-45 Interface, 1 Reset button
- Din rail mounting, 24VDC

Dimension

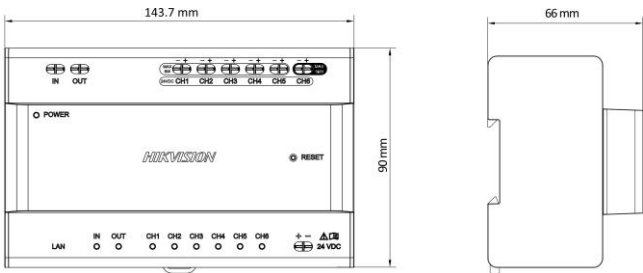

Specification

Device interfaces	
Network interface	1 RJ45
Two-wire interface	8 (2 for casacading, 6 for devices)
Signal indicator	8
Power indicator	1
Reset	1
General	
Power supply	24 VDC
Power consumption	CH1 to CH5<6 W, CH6<16 W
Working temperature	-10 ° C to 55 ° C (14 ° F to 131 ° F)
Working humidity	10% to 90%

Available Model

DS-KAD706Y

#### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.

