

DS-6901UDI Ultra High Definition Decoder



DS-6900UDI Series decoders are developed on the basis of embedded hardware platform. DS-6901UDI supports HDMI 1.4, BNC output port decoding, and multiple video stream formats, like H.265, H.264, MJPEG, H.264+ and H.265+ with strong decoding performance. It supports H.265/H.264 decoding with resolution of no more than 3200 W and 4K ultra high definition outputs. It is a new generation of decoder launched by our company for HD network cameras, which can be widely used in various video security system projects.

Video Input

- Support network camera, NVR, and other device types as network signal source inputs

Video Output

- Support HDMI 1.4 video signal output with 4K (3840 × 2160@30 Hz) ultra high definition output.
- Support two audio output methods: HDMI embedded audio and external audio output.
- Adopting frame synchronization technology to ensure complete synchronization of images from all output ports, complete graphics, smooth playback, no jamming or stuttering, no tearing or stitching.

Video Encoding and Decoding

- Adopting H.264/H.265 encoding standard, the default is H.264, supporting sub-stream and main stream encoding.
- Support decoding of network sources such as IP cameras/NVR, decoding of sub-stream and main stream, and set automatic sub-stream extraction for segmented images.
- The device has 16 video decoding channels, supporting 16-ch 200 W video decoding on the wall simultaneously.
- Support decoding streams of multiple resolution no more than 3200 W.
- H.264, H.265, H.264+, H.265+, MJPEG, HIK264 video compression decoding.
- PS, RTP, TS, ES encapsulation formats.
- G.722, G.711A, G.726, G.711U, MPEG2-L2, AAC, MP3 audio compression decoding.
- Support front-end corridor mode decoding and up to 2560 × 1440 decoding output.
- Two decoding modes: active decoding and passive decoding.
- Support encryption stream, multi-track stream, and intelligent stream decoding; support stream modification and switching; support decoding exception prompt.
- Support remote video files decoding on the wall.

Video Wall

- Support single sided video wall splicing, window opening, window cross screen roaming, scene rotation, and window rotation functions, with single screen support for three 1080p or 1.5 4K layers.
- Support 1/2/4/6/8/9/12/16 screen splitting.
- Support scenes configuration up to 64 scenes.
- Support 256 contingency plans rotation groups, each plan can be customized with setting points, scenes, and time.
- Support split screen sub-window double click to zoom in and zoom out.

- Support display output channel number.
- Support video wall to deal with network signal sources in eight directions, including automatic scanning, aperture, adjusting, focusing, and calling preset points.
- Support video wall window start/stop preview, start/stop decoding, start/stop polling, turn on/off sound, set top/bottom, and other operations.
- Support video playback function, and can start/stop playback and time selection for video recording.
- Support the use of smart wall clients to cast the desktop screen on the wall.
- Support RTP/RTSP protocol for network source preview.

Device Access

- Support docking with 3200 W Eagle Eye, fish eye, and conventional front-end IP cameras, DVR, NVR, and XVR devices, compatible with mainstream third-party manufacturer security system devices.
- Support the platform to integrate the decoding devices by SDK.
- Support ONVIF and GB28181 protocol to access the decoder.
- Support LCD information interactive, including display information acquirement, image configuration, series ports control, time synchronization, backlight parameters configuration and acquirement, output port disconnected automatically, error code uploaded.

Maintenance


- Support network keyboard/serial port keyboard access for device control, and perform video screen switching, group operation and rotation, field switching, PTZ control, video wall playback, etc. through keyboard operation.
- Support PC client, login and operation through web browser.
- Chrome 45+ support.
- Built-in gigabit switching network that supports optoelectronic adaptation, link aggregation, and NAT function.
- Support remote acquisition, and configuration of parameters, as well as remote export and import of parameters.
- Support remote system working status and system logs acquirement.
- Support daily maintenance such as remote reboot, restore default setting and upgrading.
- Support auto-check and alarm, including network disconnect, IP conflict, illegal access, temperature exceeding limits, abnormal fan status, abnormal decoding signal source and device.
- Support user permission management, allowing users with different permissions to use designated resources and operate designated video wall modules.
- Support visual maintenance, display the main control and subsystem network topology structure and keynote network status on the maintenance interface.
- Support NTP time synchronization and manual time synchronization.

• Specification

| Model | | DS-6901UDI |
|-----------------------|------------------------------------|--|
| Interface | Network Interface | RJ45 × 1, 10 M/100 M/1000 Mbps self-adaptive Ethernet interface |
| | Alarm In | 8-ch alarm in |
| | Alarm Out | 8-ch alarm out |
| | Serial Interface | RS-232 (RJ45) × 1, RS-485 × 1 |
| Video Wall Parameters | Video Wall No. | 1 |
| | Video Wall Size | ≤ 1 |
| | Split Window | Yes |
| | Split Screen | 1, 2, 4, 6, 8, 9, 12, 16 |
| | Screen Layer | 1080p × 3 or 4K × 1.5 |
| | Window Layer | Screen Layer No. × Interface No. |
| | Scene No. | 64 |
| | Scene Auto-Switch Delay | 3 s |
| | Contingency Plans NO. | Support 256 platform contingency plans |
| | Base Image No. | Background color Only |
| | Subtitle No. | N/A (optional to support) |
| | Local Signal Source Decoding Delay | 120 ms |
| | Decoding Signal Source Delay | 120 ms |
| General | Net Weight | ≤ 1.12 Kg (2.47 lb) |
| | Dimensions(W × D × H) | 220 mm × 148 mm × 45 mm (8.66 inch × 5.83 inch × 1.77 inch) |
| | Dimensions(W × D × H) | Decoder × 1 Certificate of Conformity/Warranty Card/Element Table × 1 Power Cord × 1 Grounding Wire × 1 |
| | Gross Weight | ≤ 1.663 Kg (3.67 lb) |
| | Power Consumption | ≤ 15 W |
| | Power Supply | External 12 VDC |
| | Working Temperature | -10 °C to 55 °C (14 °F to 131 °F) |
| | Working Humidity | 10% to 90% |
| Audio Encoding | Audio Encoding Format | G711A/G711U/G722.1/ G726-16/U/A /MPEG/AAC-LC |
| Video Output | Output Interface Type | HDMI 1.4 |
| | Output Interface No. | 1 |
| | Max. Output Resolution | 4K |
| | Output Resolution | HDMI: 4K: 3840 × 2160@30 Hz, 2560 × 1440@30 Hz, 1920 × 1200@60 Hz, 1920 × 1080@50 Hz/60 Hz, 1680 × 1050@60 Hz, 1600 × 1200@60 Hz, 1280 × 1024@60 Hz, 1280 × 720@50 Hz/60 Hz, 1024 × 768@60 Hz |
| | Video Output Interface (BNC) | 1-ch BNC |
| Video Decoding | Video Output Resolution (BNC) | BNC: PAL: 704 × 576, NTSC: 704 × 480 |
| | Video Decoding Channel | 16 |
| | Video Decoding Format | H.264, H.265, H.264+, H.265+, MJPEG |
| | Decoding Resolution | Up to 3200 W |
| Audio Output | Video Decoding Performance | Support 1-ch 3200 W/2400 W/2-ch 1200 W/4-ch 800 W/5-ch 600 W/ 9-ch 400 W/16-ch 1080p and below real-time decoding |
| | Audio Output Interface No. | 1 |
| Audio Decoding | Audio Output Interface Type | HDMI embedded or BNC |
| | Audio Decoding Format | G711A, G711U, G722.1, G726-16/U/A, MPEG, AAC-LC |

Physical Interface


| Front Panel | Description | Rear Panel | Description |
|-------------|--|------------|--|
| PWR | Power supply indicator, red for normal working status | RS-232 | RS-232 Serial Port |
| LINK | Network connection indicator, yellow and green for normal working status. | LAN | LAN 10/100/1000 Mbps self-adaptive Ethernet interface, as a management network interface |
| Tx/Rx | Data transmitting status Indicator, flashing yellow for normal working status. | RS-485 | RS-485 Interface |
| HDMI | HDMI Output Interface | ALARM | 8-ch Alarm In/Out |
| AUDIO OUT | Audio Output Interface | DC12 V | Power Supply DC 12 V |
| VIDEO OUT | BNC Video Output Interface | | |

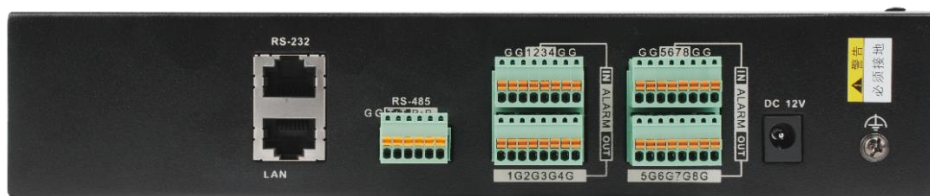

▪ Available Model

DS-6901UDI(C)

▪ Dimension

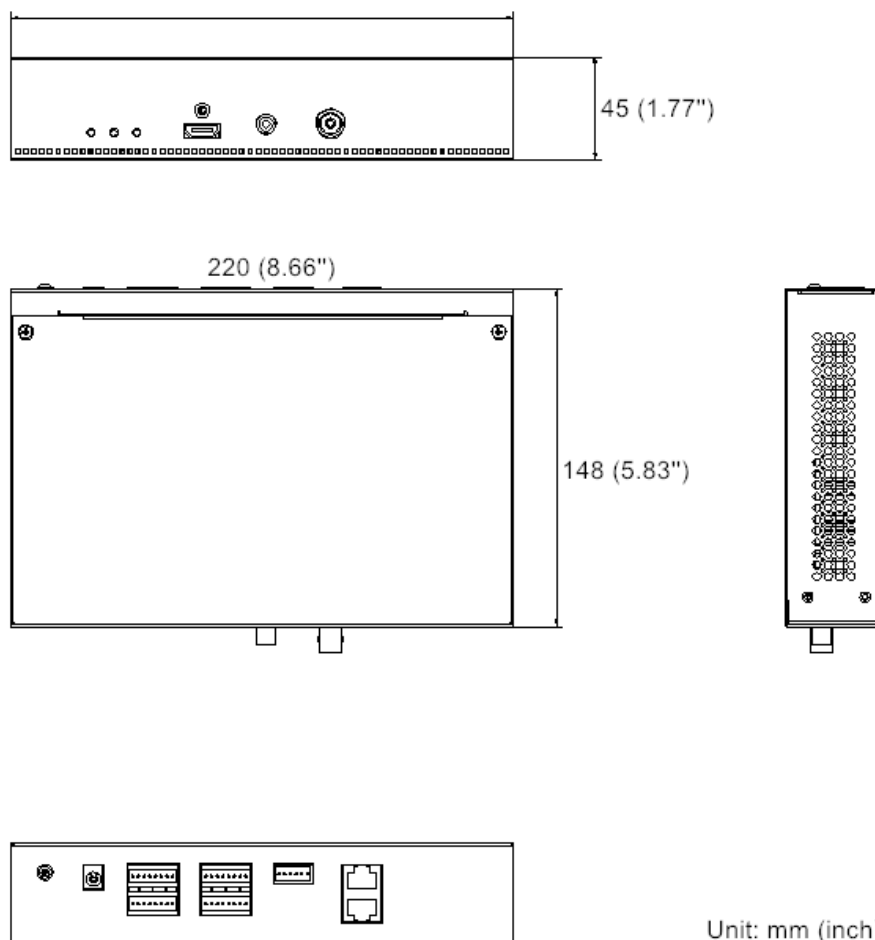

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq