


RJ45 FTP TOOLLESS PLUG

PATENTED

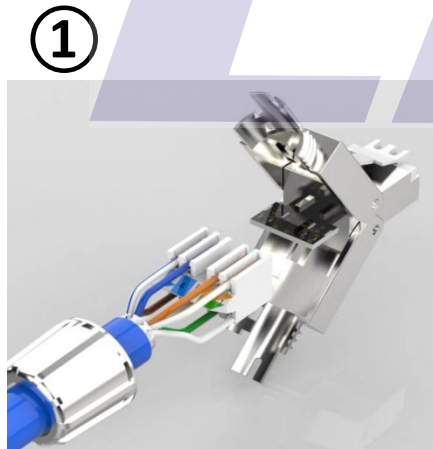

TYPE:

1. CAT6A RJ45 SHIELDED TOOLLESS PLUG WITH PLASTIC BATCH
2. COLOUR: METAL COLOR
3. ROHS, REACH COMPLIANT

CABLE MATCHED:

1. SOLID AND STRANDED
2. 22AWG/23AWG/24AWG

ELECTRICAL:

1. CONTACT RESISTANCE: 20m OHM
2. INSULATION RESISTANCE: $\leq 500M$ OHM @100 V DC
3. WITHSTAND VOLTAGE: DC1000V AC700V RMS 60Hz, 1MIN
4. CAT6 PERMANENT LINK: CONFORM TO ANSI/TIA/EIA 568B. 2-10

ENVIRONMENTAL:

1. STORAGE: -40° / $+70^{\circ}$
2. OPERATION: -10° / $+60^{\circ}$

MECHANICAL:

1. SHIELDED MATERIAL: ZINC ALLOY
2. PLASTIC MATERIAL: NEW PC
3. GOLD PINS: PHOSPHOR BRONZE, GOLD PLATING 3U"
4. TERMINAL PINS: STAINLESS STEEL, NICKEL PLATING
5. RJ45 CONTACT LIFE: 750 TIMES MIN
6. IDC TERMINAL LIFE: 250 TIMES MIN

RJ45 FTP TOOLLESS PLUG

