


DS-KD-K12 **Nametag module**



- Nametag module of modular door station
- 12 nametag buttons calling design for easier calls
- IP65 protection level
- Backlight compensation behind the nametag buttons
- Easy to use and extend


▪ Specification

System parameters	
Operation system	Linux
ROM	/
RAM	/
Processor	Embedded high performance processor
Device interfaces	
RS-485	1
General	
Button	12 physical buttons
Power consumption	≤ 2 W
Indicator	/
Weight	Net weight: 179 g; Gross weight: 336.4 g
Protective level	IP65
Working temperature	-30 °C to 55 °C
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	98.2 mm × 100.2 mm × 33.7 mm (3.87" × 3.95" × 1.33")
Installation	Flush mounting, surface mounting

▪ Available Model

DS-KD-K12

▪ Dimension

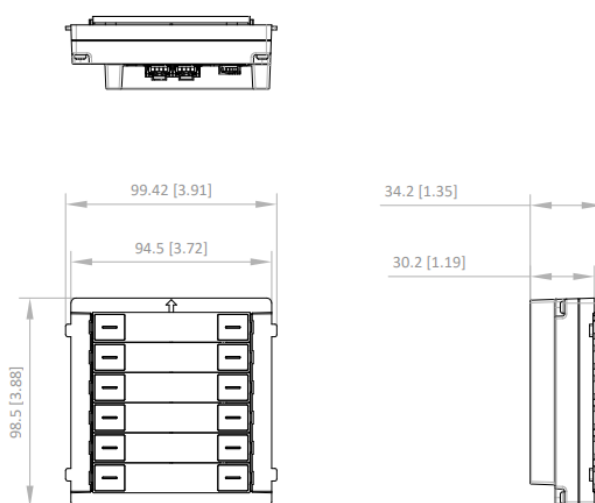

Unit: mm [inch]

SCALE	1:1
-------	-----

▪ **Accessory**

▪ **Optional**

DS-KD8003-IME 1(B) KD8 Series Modular Door Station	DS-KD8003-IME 1(B)/S KD8 Series Pro Modular Door Station	DS-KD8003-IME 1(B)/NS KD8 Series Pro Modular Door Station	DS-KD8003-IME 1(B)/Flush KD8 Series Pro Modular Door Station	DS-KD8003-IME 1(B)/Surface KD8 Series Pro Modular Door Station
				
DS-KD8003Y-IM E2/S Two wire main unit	DS-KD8003Y-IM E2/NS Two wire main unit	DS-KD8003Y-IM E2 Two wire main unit	DS-KD7003EY-I ME2 2-wire HD Door Station	DS-KD7003EY-I ME2/Aluminum 2-wire HD Door Station
				

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq