

更改 REV	出图日期 DATE	设变内容 MODIFICATION	修 改 DRAWN
B	2011/03/03 2015/01/14	铁壳燕尾部位改为R角	CathyLi

SPECIFICATIONS

1.ELECTRICAL:

UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 VOLTS AC.
INSULATION RESISTANCE: 100 M Ω .
TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.

2.MECHANICAL:

CABLE-TO-PLUG TENSILE STRENGTH : 20POUND MIN.
DURABILITY : 200 MATING CYCLES.

3.MATERIAL & FINISH:

HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
COLOR : TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
CONTACT BLADE: COPPER ALLOY.
CONDUCTOR : STRANDED & SOLID WIRE , 22AWG, 24 AWG
(It can be used for the wire OD from ϕ 1.35- ϕ 1.45)
GOLD PLATING: 3u"-50u", ARE AVAILABLE.

规范

1. 电器:

UL应用最大250VOLTS AC.
介质耐电压伏特数:1000VOLTS AC.
绝缘阻抗:100百万欧姆.
终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.

2. 机构

拉力测试:至少20磅.
耐力测试:至少200次之插拔测试.

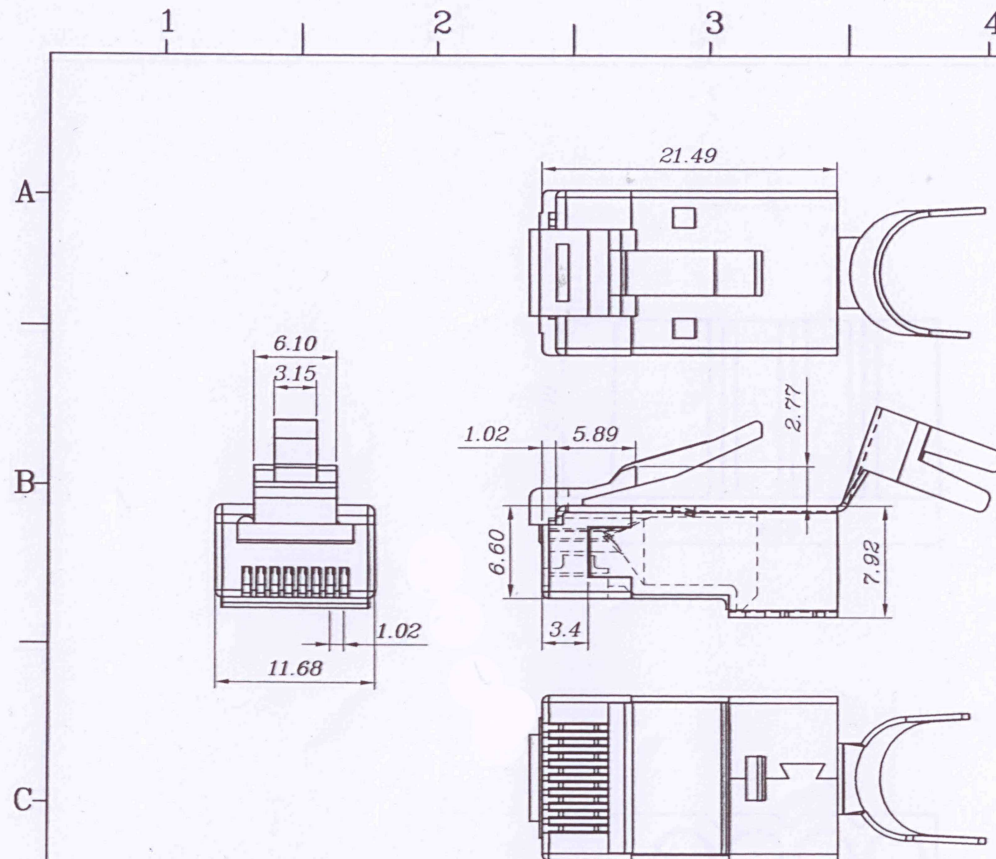
3. 材质表面处理







塑胶壳:聚碳酸酯,UL-94V-0 or UL94V-2.
颜色:透明,或者其他颜色亦可.
金片:铜合金.
导体:多股线&单股线,22AWG,24AWG.
(芯线直径: ϕ 1.35~ ϕ 1.45均可适用)
镀金厚度:3u"~50u",皆可提供.

客户用产品图

KON8/8-50D/L6A

LEXA[®] NET
PROFESSIONAL NET ACCESSORIES



BLADE:	Y	YB	Z	AE	AL	ZL	
Drawing							
Mark			✓			✓	
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"	
Mark					✓		
					CABLE TYPE	ROUND	FLAT
					Mark	✓	



ST-DR-009A