


## GYFXTH - 2-12F core multimode cable

### Profile View

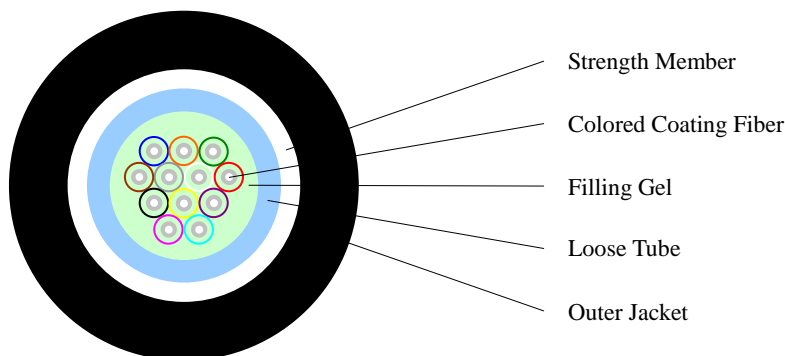

### Fiber Parameters

No.	Items		Unit	Specification
				50/125
1	Core Diameter		μm	50.0±2.5
2	Cladding Diameter		μm	124.8±1.0
3	Cladding Non-Circularity		%	≤1.0
4	Core-Cladding Concentricity Error		μm	≤1.5
5	Coating Diameter		μm	245±7
6	Coating Non-Circularity		%	≤6.0
7	Cladding-Coating Concentricity Error		μm	≤12.0
8	Bandwidth(min.)	850nm	MHz·km	600
		1300nm	MHz·km	1200
9	Attenuation Coefficient	850nm	dB/km	≤3.5
		1300nm	dB/km	≤1.5

### Cable Parameters

Items		Specifications
Fiber Count		2F TO 12F
Colored Coating Fiber	Dimension	250μm±15μm
	Color	Blue、Orange、Green、Brown、Gray、Natural、Red、Black、Yellow、Purple、Pink、Aqua
Loose Tube	Dimension	2.0mm±0.1mm
	Material	PBT
	Color	Natural
Strength Member		Glass Yarn
Outer Jacket	Dimension	5.8mm±0.2mm
	Material	LSZH
	Color	Black/Yellow/Orange/Blue

### Mechanical and Environmental Characteristics

Items	Unite	Specifications
Tension (Long Term)	N	600
Tension (Short Term)	N	1500
Crush (Long Term)	N/10cm	300
Crush (Short Term)	N/10cm	1000
Min. Bend Radius (Dynamic)	mm	20D
Min. Bend Radius (Static)	mm	10D
Installation Temperature	°C	-20~+60
Operating Temperature	°C	-30~+70
Storage Temperature	°C	-30~+70