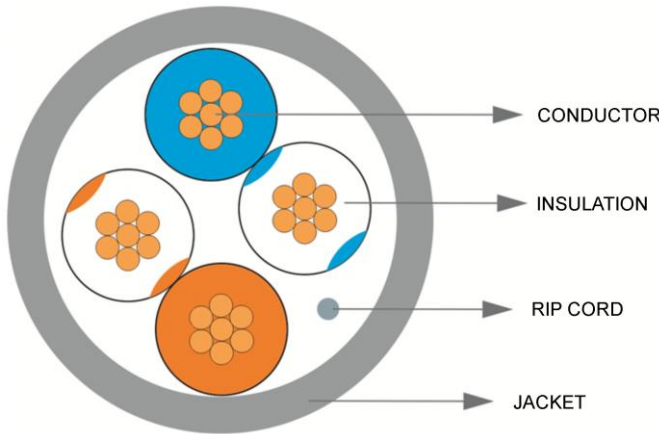


TYPE: U/UTP CAT5E 2P 7*0.18		UTP CAT5E 2P PVC Stranded Cable	
<b>Structure</b>			
<div></div>			
<b>Physical:</b>	<b>Conductor:</b> Material: stranded bare copper Diameter: 7*0.18±0.005mm /24AWG		
	<b>Insulation:</b> Material: HDPE Diameter: 0.89±0.03mm		
	<b>Jacket:</b> Material: PVC Diameter: 4.0±0.3mm Thickness: ≥0.5mm Color: GREY RAL 7035		
	<b>Other:</b> Rip cord: optional Jacket Marking: LEXI ProNet 65502A 2PR 24AWG UTP SOLID CABLE PVC Eca ETL&EC VERIFIED TIA/EIA-568-B.2 CAT 5e (11-2020) 0m (0-500m)		
<b>Physical Characteristics</b>		<b>Electrical Characteristics (20°C)</b>	
Insulation Tensile strength: ≥16MPa Insulation Elongation ratio: ≥300% Jacket Tensile strength: ≥13.5MPa Jacket Elongation ratio: ≥150%		Linear resistance: ≤14Ω/100m insulation resistance: ≥5000MΩ/km Dielectric Strength DC.1kV.1min no breakdown	
<b>Install info</b>		<b>Standard</b>	
working temperature: -20°C to +60°C Bending radius: ≥10×out diameter		ISO/IEC 11801 TIA568.2-D EN50173 RoHS 2011/65/EU REACH EC 1907/2006	