

REV.	REVISIONS	DATE	BY
A	CR06037	01/16/2006	Tom
B	CR07061	06/28/2006	Tom

## Specification:

Qualified Cat.6/CLASS E  
Permanent Link/Channel of TIA/EIA568B-2.1 Cat.6  
ISO/IEC 11801 2nd Edition  
EN 50173 2nd Edition  
IEC 60603-7

## Physicals

Housing : PC,UL94V-0

### PCB MODULE

Insertion : PBT UL94V-0

Contact :  $\varnothing$  0.46 mm Phosphor Bronze

30 Micro inches gold over nickel plating

IDC termination for cable : Accept AWG 23~26 solid wire

Terminal : 0.4 mm Phosphor Bronze tin plating





IDC Holder : PC,94V-0

PCB : FR4 1.0mm Thickness

Cap : PC,UL94V-0

SHIELD CAP : SPTE 0.30mm Thickness

SHIELD BASE : SPTE 0.30mm Thickness

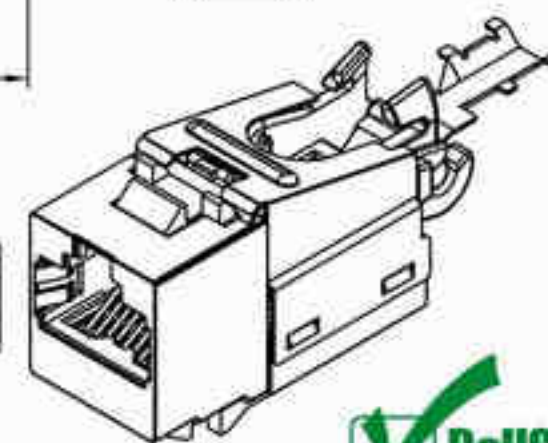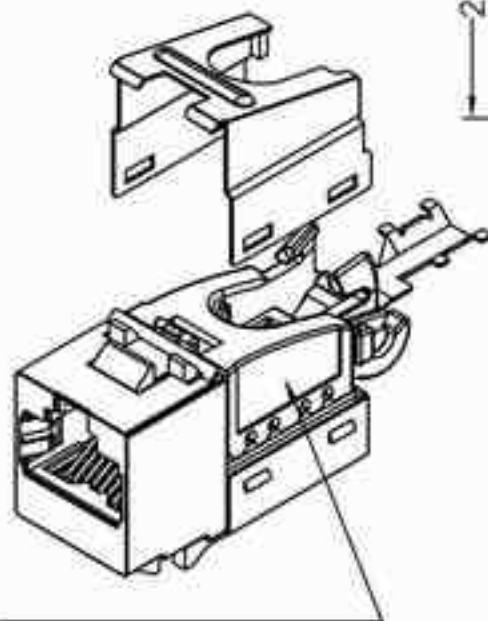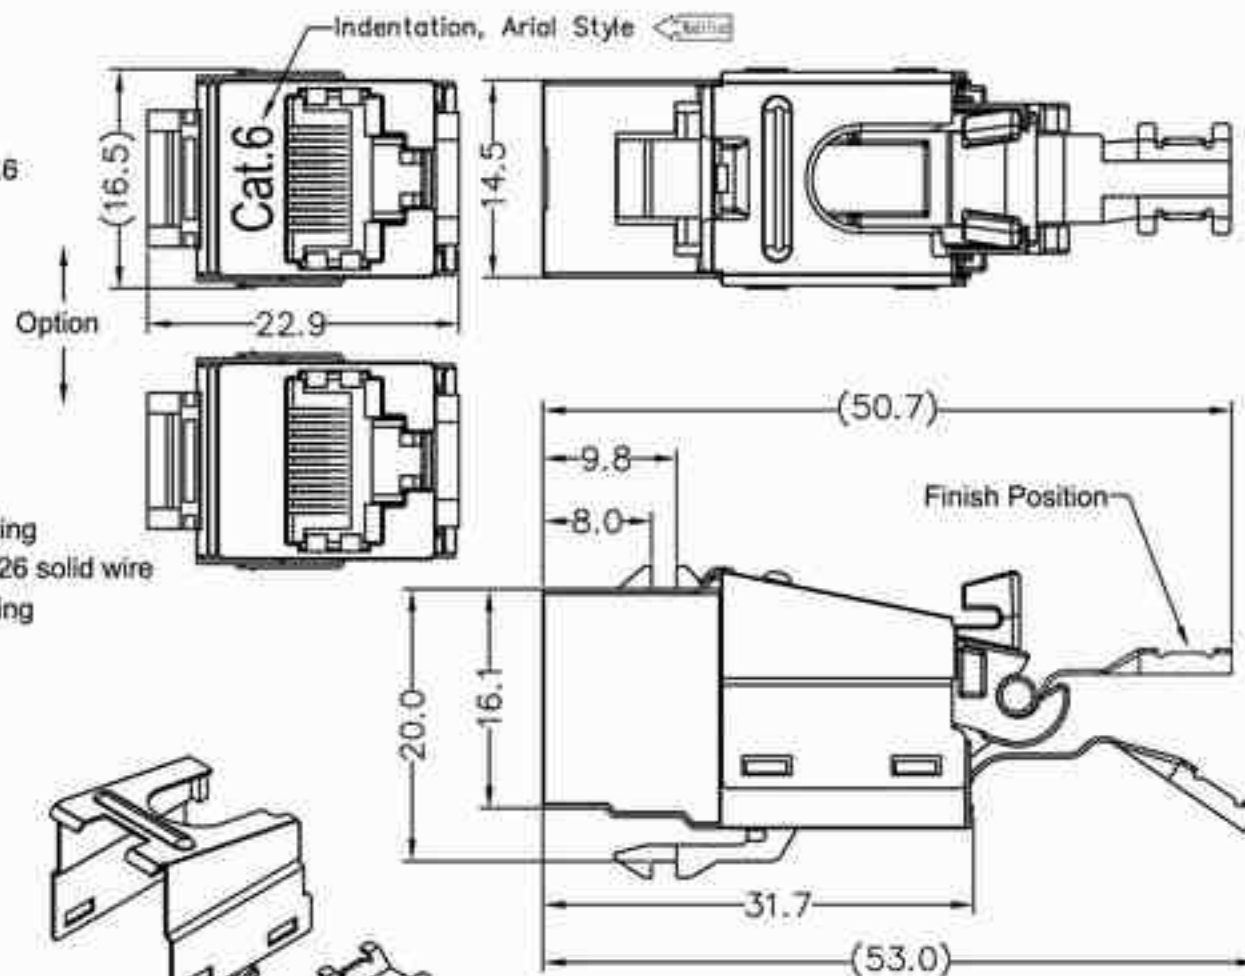

BOTH SIDES COLOR CODE LABEL



TOLERANCE	SCALE	SHEET	DRAWN BY	DATE	TITLE	
.X	±0.30	X	1 OF 1	08/23/2007		
.XX	±0.20	REV.	C	08/23/2007	CAT.6	
ANGLES	±0.50°	MATERIAL	THIRD ANGLE PROJECTION	DATE	STP TOOLLESS KEYSTONE JACK	
					PART NO.	DWG. NO.
					TA8768ST-XX	R504103

**LEXI** NET  
PROFESSIONAL NET ACCESSORIES