

REV.	REVISIONS	DATE	BY
A	CR07061	06/28/2006	Tom

Specification:

Qualified Cat.6/CLASS E
Permanent Link/Channel of TIA/EIA568B-2.1 Cat.6
ISO/IEC 11801 2nd Edition
EN 50173 2nd Edition
IEC 60603-7

Physicals

Housing : PC,UL94V-0

PCB MODULE

Insertion : PBT UL94V-0

Contact : \varnothing 0.46 mm Phosphor Bronze

30 Micro inches gold over nickel plating

IDC termination for cable : Accept AWG 23~26 solid wire




Terminal : 0.4 mm Phosphor Bronze tin plating

IDC Holder : PC,94V-0


PCB : FR4 1.0mm Thickness

Cap : PC,UL94V-0

Door : PC,UL94V-0

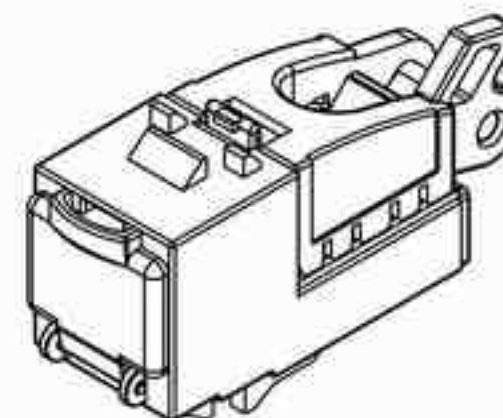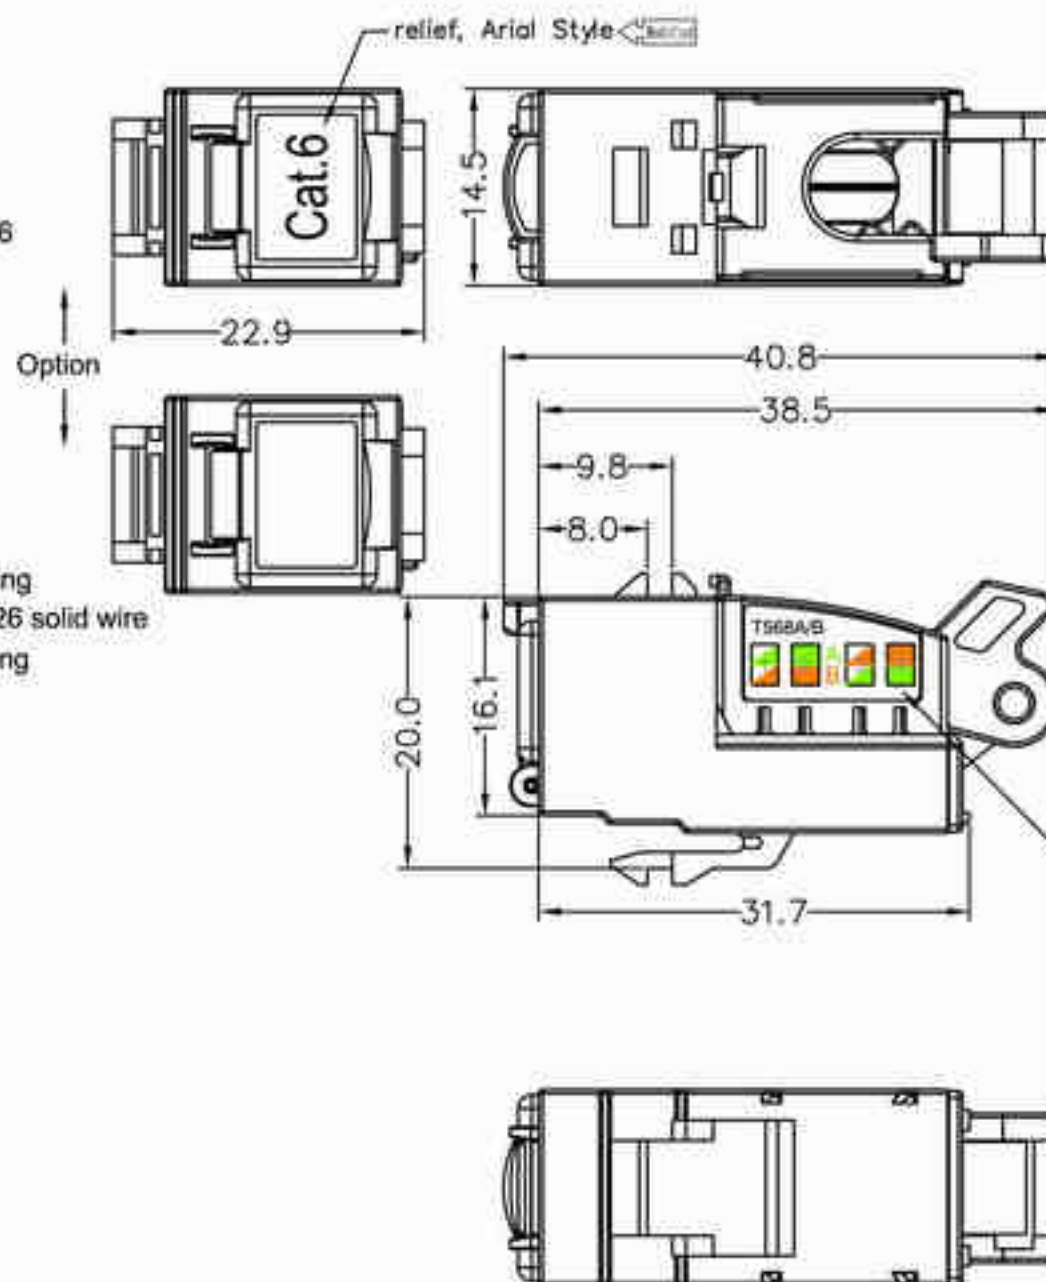

BOTH SIDES COLOR CODE LABEL



TOLERANCE		SCALE	SHEET	DRAWN BY	DATE	TITLE	
.X	± 0.30	X	1 OF 1	Tom	08/23/2007		
.XX	± 0.20	B		Peter	08/23/2007	Cat.6 UTP TOOLLESS KEYSTONE JACK WITH DOOR	
ANGLES	$\pm 0.50^\circ$	MATERIAL		THIRD ANGLE PROJECTION		PART NO.	DWG. NO.
						TA8768UD-XX	R504107

LEXI NET
PROFESSIONAL NET ACCESSORIES