

REV.	REVISIONS	DATE	BY
A	CR07002	01/03/2007	Tom
B	CR07061	01/09/2007	Tom

Specification:

Qualified Cat.6A / Class E_A (10G/500MHz)
TIA/EIA-568-B.2-10 draft 3
ISO/IEC 11801 2nd Edition, EN 50173 2nd Edition
IEC 60603-7

Physicals

Housing : PC,UL94V-0

PCB MODULE

Insertion : PBT UL94V-0

Contact : Ø 0.46 mm Phosphor Bronze

30 Micro inches gold over nickel plating

IDC termination for cable : Accept AWG 23~26 solid wire

Terminal : 0.4 mm Phosphor Bronze tin plating


IDC Holder : PC,94V-0

PCB : FR4 1.0mm Thickness

Cap : PC,UL94V-0

SHIELD CAP : SPT 0.30mm Thickness

SHIELD BASE : SPT 0.30mm Thickness

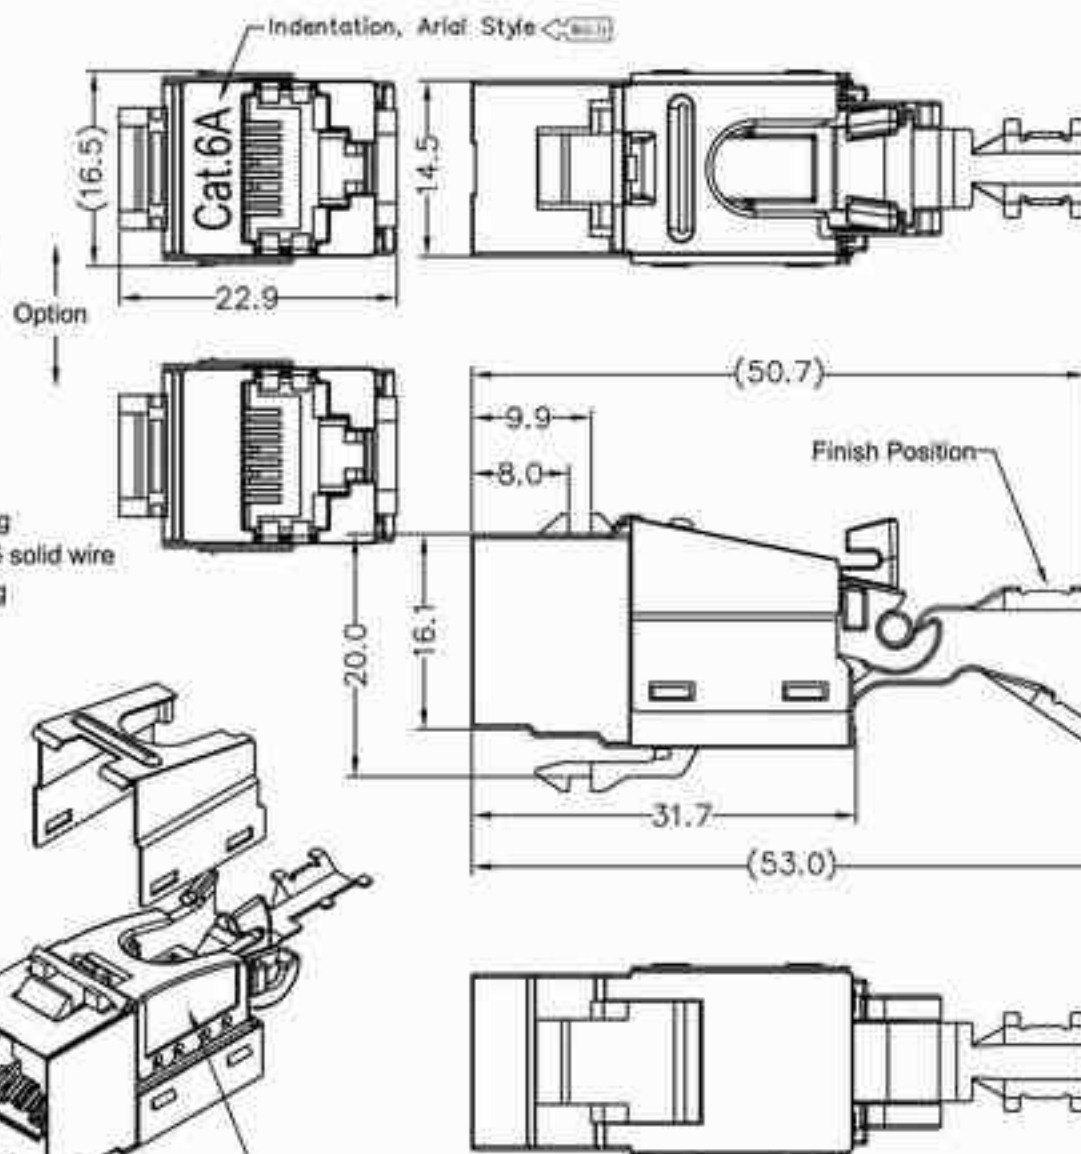

BOTH SIDE COLOR CODE LABEL



TOLERANCE		SCALE	SHEET	DRAWN BY	DATE	TITLE	
X	±0.30	1:1	1 OF 1	Tom	08/31/2007		
XX	±0.20	REV. C		CHECKED BY Peter	DATE 08/31/2007	CAT.6A STP TOOLLESS KEYSTONE JACK	
ANGLES	±0.50°	MATERIAL		THIRD ANGLE PROJECTION		PART NO. TA876AST-XX	DWG. NO. R504111

LEXANET
PROFESSIONAL NET ACCESSORIES