

## DS-3E2528 Gigabit Full Managed Switch



### Features and Functions

- DS-3E2528 supports the telecom-level Ethernet-ring protection protocol with a protection shift time of less than 50ms, STP/RSTP, backup of active and standby uplinks, and LACP link aggregation to cater to the requirements of high reliability of carriers;
- DS-3E2528 has powerful ACL functions to access and control L2-L7 data, providing carriers flexible and various policy control methods;
- DS-3E2528 supports In-Service Software Upgrade (ISSU) to ensure the unremitting data forwarding during system upgrade;
- DS-3E2528 supports various L2 multicast functions such as IGMP-snooping, user fast-leave mechanism and trans-vlan multicast copy;
- DS-3E2528 supports priority retagging and complicated flow classification based on VLAN, MAC, source address, destination address, IP or priority to better streamline carrier's services;
- DS-3E2528 provides flexible bandwidth control policies, supporting port-/flow-based flow limit, and ensuring the line speed forwarding of each port to make sure the high quality of network services;
- DS-3E2528 supports multiple queue schedule algorithms such as SP, WRR, or "SP plus WRR";
- Equipment-level security: The advanced hardware infrastructure design realizes the level-based packet schedule and packet protection, prevents DoS-/TCP-related SYN Flood, UDP Flood, Broadcast Storm or large traffic attacks, and supports level-based command line protection, endowing different levels of users with different management permissions;
- Perfect security authentication mechanisms: IEEE 802.1x, Radius and BDTacacs+;
- DS-3E2528 supports storm/multicast/unicast limit which ensures the normal running of equipment in harsh network conditions;
- DS-3E2528 supports perfect ring detection mechanism which ensures the long-term stable running of network;
- DS-3E2528 supports port isolation within the same VLAN, DHCP-Snooping, and IP plus MAC plus Port binding for ensuring user data security;
- DS-3E2528 supports many management modes such as the console port, Telnet, SSH;
- DS-3E2528 supports the WEB management mode, which is easy and efficient so that it makes installation and debugging convenient;
- DS-3E2528 supports TFTP-patterned file upload/download management;




## Specifications

Item	DS-3E2528
Port number	24 x 10/100/1000Base-T ports, 4 1000Base-X SFP ports, 1 Console port
Switching capacity	56Gbps
Packet forwarding rate	42Mpps
MAC address table	8K
Dimensions(L × H × D)	440 mm × 45 mm × 230 mm
Consumption	<15W
Power supply	AC : 100V-240V , 50Hz±10%
Environment	Operating temperature/humidity: 0°C-45°C , 5%-95% non-condensing Storage temperature/humidity: -20°C-70°C ; 5%-95% non-condensing
MAC exchange	Static configuration and dynamic MAC learning; MAC browsing and removal Configurable aging time of the MAC address; Limited number of learnable MAC addresses; MAC filtration
VLAN	4K VLAN; GVRP; QinQ; Private VLAN
STP	802.1D (STP), 802.1W (RSTP) and 802.1S (MSTP) BPDU protection, root protection, and loopback protection
Multicast	IGMP v1/v2/v3 IGMP snooping IGMP Fast Leave Multicast group strategy and quantity limitation
QoS	Flow classification based on L2~4 protocols CAR flow limit 802.1P/DSCP priority re-labeling SP, WRR, and "SP+WRR" Congestion avoidance mechanisms like Tail-Drop and WRED Flow monitoring and flow shaping
Security	L2/L3/L4 ACL flow identification and filtration DDoS attack prevention, TCP's SYN Flood attack prevention, UDP Flood attack prevention, etc Broadcast/multicast/unknown unicast storm-control Port isolation Port security, and "IP+MAC+port" binding
Reliability	Static/LACP link aggregation EAPS and ERPS
Management	Console, Telnet, SSH2.0, Web SNMP v1/v2/v3 TFTP RMON

## Physical Interfaces

### Front Panel

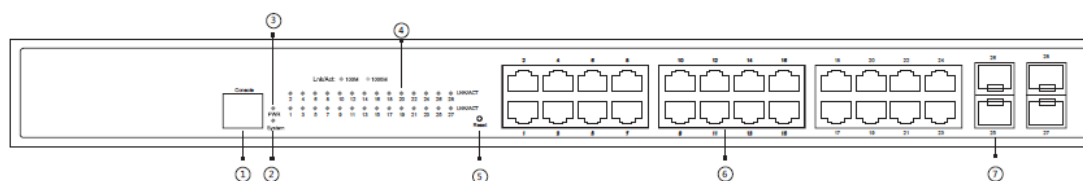

No.	Abbrev.	Name	Description
1	CONSOLE	Console port	Manages the switch locally.
2	SYS	System indicator	If the indicator is always on, the system is being started. If the indicator flickers, the system works normally.
3	PWR	Power indicator	If the switch is powered on, the indicator is on.
4	Link/ACT	LINK/ACT indicator of each port	If the indicator is on in orange: 10/100M, If the indicator is on in green: 1000M If the indicator is not on: no signal is transmitted.
5	Reset	Reset switch	Return to the factory setting.
6	/	24 gigabit RJ45 ports	Forwards the 10/100M/1000M Ethernet electric signals
7	/	4 SFP ports	Forwards 1000M Ethernet optical signals.

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-444  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahirvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com