


TA8758SX Cat.5e STD Toolless Keystone Jack

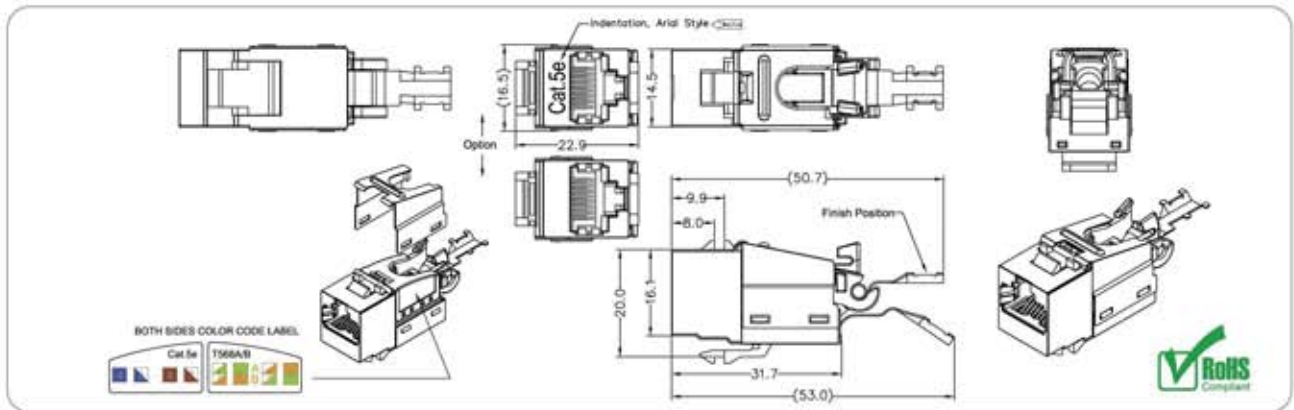

Specification:

TIA/EIA 568-B.2 Cat.5e
ISO/IEC 11801 2nd Class D Connecting Hardware
EN 50173-1 Cat.5
IEC 60603-7

Mechanical:

Plug Insertion Life: 750 Cycles Minimum
Plug & Jack Contact Force: 100 Grams Minimum
Plug Retention Force: 30 lbs Minimum
Temperature: -40°F to 150°F (-40°C to 68°C)

Electrical:

Current Rating: 1.5 Amps
Insulation Resistance: 500 Mohms Minimum
Contact Resistance: 20 mohms Maximum
DC Resistance: 0.1 ohms Maximum

Physicals:

Housing: PC, UL 94V-0
PCB module
Insertion: PBT UL 94V-0
Contact: Ø0.46 mm phosphor bronze gold over nickel plating
IDC: 0.4 mm phosphor bronze tin plating
IDC holder: PC, 94V-0
PCB: FR4
Cap: PC, UL 94V-0
Door: PC, UL 94V-0
Shield Cap: SPTE 0.30mm thickness
Shield Base: SPTE 0.30mm thickness



TA8758ST